

Codice Dianflex: 354-186

VALVOLE DI FONDO

140 Valvola di fondo



MISURA	PRESSIONE	CODICE	IMBALLO
1/2" (DN 15)	10bar/145psi	1400012	6/132
3/4" (DN 20)	10bar/145psi	1400034	12/96
1" (DN 25)	10bar/145psi	1400100	4/36
1"1/4 (DN 32)	8bar/116psi	1400114	4/32
1"1/2 (DN 40)	8bar/116psi	1400112	3/27
2" (DN 50)	8bar/116psi	1400200	2/12
2"1/2 (DN 65)	6bar/87psi	1400212	1/12
3" (DN 80)	6bar/87psi	1400300	1/6
4" (DN 100)	6bar/87psi	1400400	1/3

CERTIFICAZIONI



CAPITOLATO

Corpo in ottone.

Filtro in acciaio inox.

Guarnizione del filtro in fibra.

Tenuta in ottone.

Guarnizione tenuta in NBR.

Grado di filtrazione: 2400µm.

Temperature minima e massima d'esercizio: 0°C, 90°C.


Attacco filettato: ISO 228 (equivalente a DIN EN ISO 228 e BS EN ISO 228).

Disponibile con filetto americano NPT nelle misure 2"1/2, 3" e 4".



VALVOLE DI FONDO

INGOMBRI

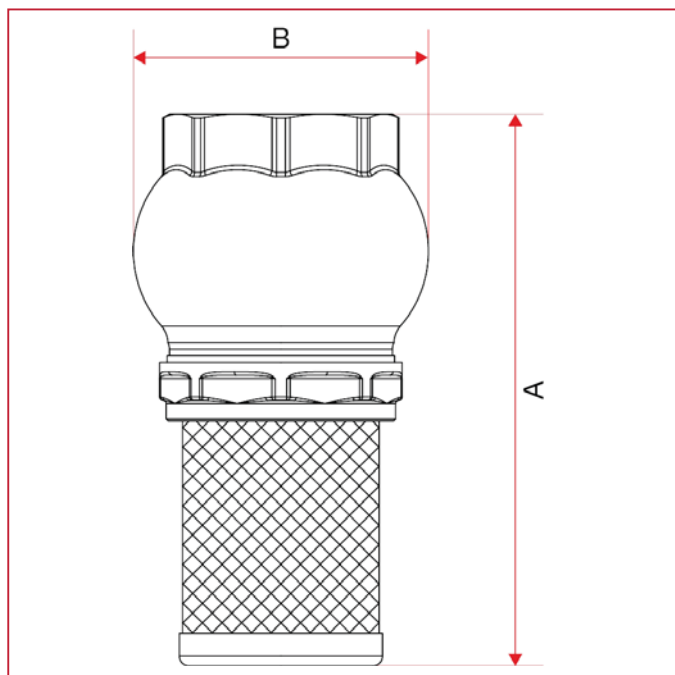


	1/2"	3/4"	1"	1"1/4	1"1/2	2"	2"1/2	3"	4"
DN	15	20	25	32	40	50	65	80	100
A	68,5	84,5	99	113,5	122,5	142,5	168	194,5	216,5
B	39	45	51	61	68,5	80	100	121	145
Kg/cm ² bar	10	10	10	8	8	8	6	6	6
LBS - psi	145	145	145	116	116	116	87	87	87



VALVOLE DI FONDO

MATERIALI

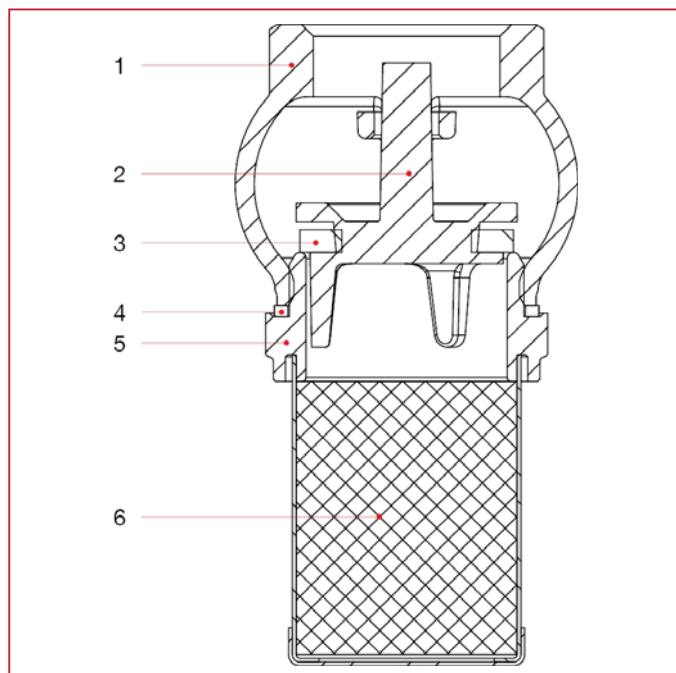

POS.	DESCRIZIONE	N.	MATERIALE
1	Corpo	1	Ottone CW617N
2	Tenuta	1	Ottone CW617N
3	Guarnizione	1	NBR
4	Guarnizione	1	Fibra
5	Ghiera	1	Ottone CW617N
6	Cartuccia	1	Acciaio inox AISI 304